

# Latest Version: 39.0

## Question: 1

A company recently added a DR site and is redesigning the network. Users at the DR site are having issues browsing websites.

### INSTRUCTIONS

Click on each firewall to do the following:


Deny cleartext web traffic.

Ensure secure management protocols are used. Resolve issues at the DR site.

The ruleset order cannot be modified due to outside constraints.

If at any time you would like to bring back the initial state of the simulation, please click the Reset All button.

### Network Diagram

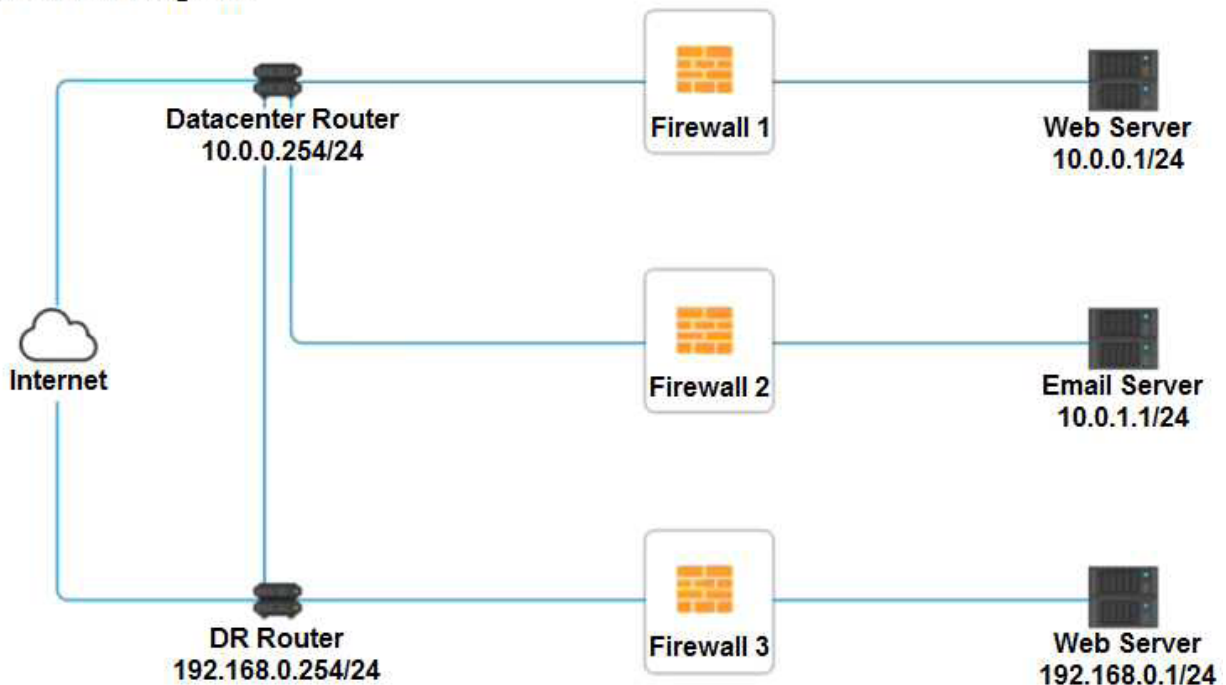

## Firewall 2



| Rule Name      | Source  | Destination   | Service  | Action                                   |
|----------------|---|---|--|--|
| DNS Rule       | <input type="text"/> ▼<br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/> ▼<br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/> ▼<br>ANY<br>DNS<br>HTTP<br>HTTPS<br>TELNET<br>SSH | <input type="text"/> ▼<br>PERMIT<br>DENY |
| HTTPS Outbound | <input type="text"/> ▼<br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/> ▼<br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/> ▼<br>ANY<br>DNS<br>HTTP<br>HTTPS<br>TELNET<br>SSH | <input type="text"/> ▼<br>PERMIT<br>DENY |
| Management     | <input type="text"/> ▼<br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/> ▼<br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/> ▼<br>ANY<br>DNS<br>HTTP<br>HTTPS<br>TELNET<br>SSH | <input type="text"/> ▼<br>PERMIT<br>DENY |
| HTTPS Inbound  | <input type="text"/> ▼<br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/> ▼<br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/> ▼<br>ANY<br>DNS<br>HTTP<br>HTTPS<br>TELNET<br>SSH | <input type="text"/> ▼<br>PERMIT<br>DENY |
| HTTP Inbound   | <input type="text"/> ▼<br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/> ▼<br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/> ▼<br>ANY<br>DNS<br>HTTP<br>HTTPS<br>TELNET<br>SSH | <input type="text"/> ▼<br>PERMIT<br>DENY |

Reset Answer

Save

Close

| Firewall 3     |   |   |  |  |
|----------------|---|---|--|--|
| Rule Name      | Source  | Destination   | Service  | Action                                 |
| DNS Rule       | <input type="text"/><br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/><br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/><br>ANY<br>DNS<br>HTTP<br>HTTPS<br>TELNET<br>SSH | <input type="text"/><br>PERMIT<br>DENY |
| HTTPS Outbound | <input type="text"/><br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/><br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/><br>ANY<br>DNS<br>HTTP<br>HTTPS<br>TELNET<br>SSH | <input type="text"/><br>PERMIT<br>DENY |
| Management     | <input type="text"/><br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/><br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/><br>ANY<br>DNS<br>HTTP<br>HTTPS<br>TELNET<br>SSH | <input type="text"/><br>PERMIT<br>DENY |
| HTTPS Inbound  | <input type="text"/><br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/><br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/><br>ANY<br>DNS<br>HTTP<br>HTTPS<br>TELNET<br>SSH | <input type="text"/><br>PERMIT<br>DENY |
| HTTP Inbound   | <input type="text"/><br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/><br>ANY<br>10.0.0.1/24<br>10.0.1.1/24<br>192.168.0.1/24 | <input type="text"/><br>ANY<br>DNS<br>HTTP<br>HTTPS<br>TELNET<br>SSH | <input type="text"/><br>PERMIT<br>DENY |

**Answer: See explanation below.**

Explanation:

Explanation:

Firewall 1:

DNS Rule – ANY --> ANY --> DNS --> PERMIT

HTTPS Outbound – 10.0.0.1/24 --> ANY --> HTTPS --> PERMIT

Management – ANY --> ANY --> SSH --> PERMIT


HTTPS Inbound – ANY --> ANY --> HTTPS --> PERMIT

HTTP Inbound – ANY --> ANY --> HTTP --> DENY

Firewall 2:

No changes should be made to this firewall


Firewall 3:

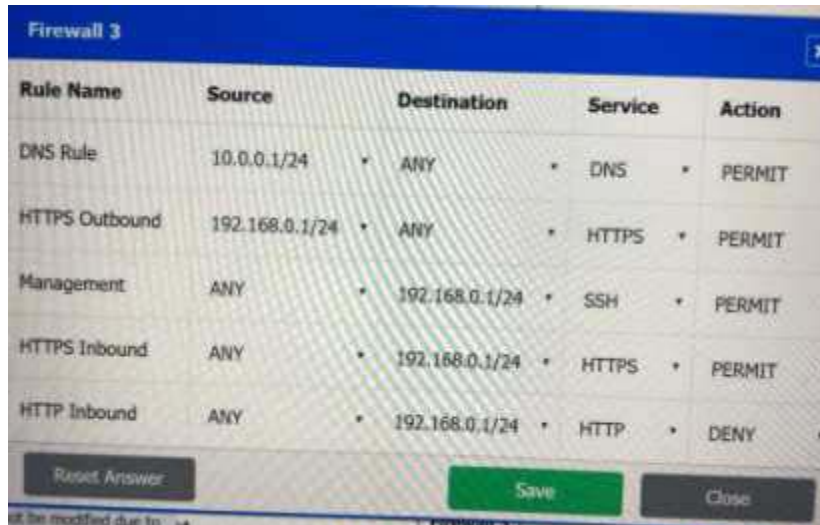

The screenshot shows the configuration interface for Firewall 3. It contains a table with the following data:

| Rule Name      | Source         | Destination    | Service | Action |
|----------------|----------------|----------------|---------|--------|
| DNS Rule       | 10.0.0.1/24    | ANY            | DNS     | PERMIT |
| HTTPS Outbound | 192.168.0.1/24 | ANY            | HTTPS   | PERMIT |
| Management     | ANY            | 192.168.0.1/24 | SSH     | PERMIT |
| HTTPS Inbound  | ANY            | 192.168.0.1/24 | HTTPS   | PERMIT |
| HTTP Inbound   | ANY            | 192.168.0.1/24 | HTTP    | DENY   |

Buttons at the bottom: "Reset Answer", "Save", "Close".

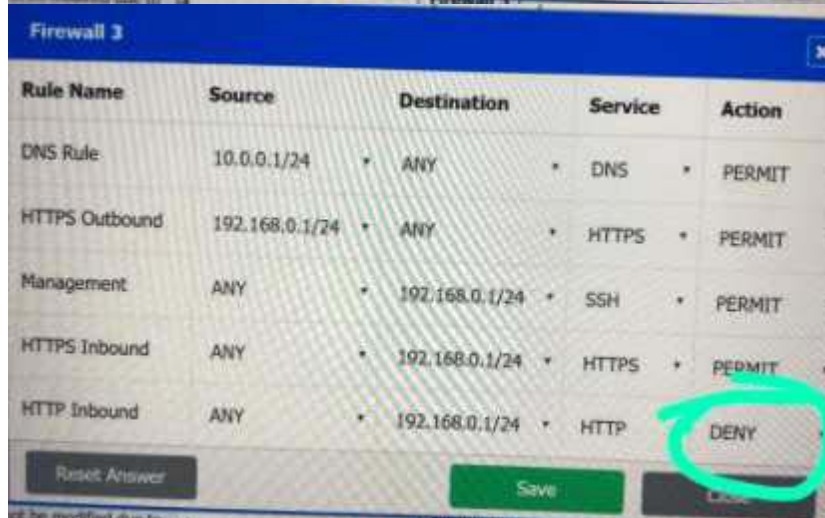

The screenshot shows the configuration interface for Firewall 3, identical to the one above. The 'DENY' action for the 'HTTP Inbound' rule is circled in red.

| Rule Name      | Source         | Destination    | Service | Action |
|----------------|----------------|----------------|---------|--------|
| DNS Rule       | 10.0.0.1/24    | ANY            | DNS     | PERMIT |
| HTTPS Outbound | 192.168.0.1/24 | ANY            | HTTPS   | PERMIT |
| Management     | ANY            | 192.168.0.1/24 | SSH     | PERMIT |
| HTTPS Inbound  | ANY            | 192.168.0.1/24 | HTTPS   | PERMIT |
| HTTP Inbound   | ANY            | 192.168.0.1/24 | HTTP    | DENY   |

Buttons at the bottom: "Reset Answer", "Save", "Close".

DNS Rule – ANY --> ANY --> DNS --> PERMIT

HTTPS Outbound – 192.168.0.1/24 --> ANY --> HTTPS --> PERMIT

Management – ANY --> ANY --> SSH --> PERMIT

HTTPS Inbound – ANY --> ANY --> HTTPS --> PERMIT

HTTP Inbound – ANY --> ANY --> HTTP --> DENY

## Question: 2

DRAG DROP

A security engineer is setting up passwordless authentication for the first time.

INSTRUCTIONS

Use the minimum set of commands to set this up and verify that it works. Commands cannot be reused. If at any time you would like to bring back the initial state of the simulation, please click the Reset All button.

The image shows a simulation interface with two main panels:

- Commands Panel:** A blue header labeled "Commands" is above a list of seven orange buttons, each containing a terminal command:
  - `chmod 644 ~/.ssh/id_rsa`
  - `chmod 777 ~/.ssh/authorized_keys`
  - `scp ~/.ssh/id_rsa user@server:~/.ssh/authorized_keys`
  - `ssh root@server`
  - `ssh-keygen -t rsa`
  - `ssh-copy-id -i ~/.ssh/id_rsa.pub user@server`
  - `ssh -i ~/.ssh/id_rsa user@server`
- SSH Client Panel:** A grey header labeled "SSH Client" is above a white text input field. The input field contains a yellow question mark icon, indicating it is empty and ready for input.

**Answer:**



### Question: 3

#### HOTSPOT

Select the appropriate attack and remediation from each drop-down list to label the corresponding attack with its remediation.

#### INSTRUCTIONS

Not all attacks and remediation actions will be used.

If at any time you would like to bring back the initial state of the simulation, please click the Reset All button.

| Attack Description  | Target          | Attack Identified  | BEST Preventative or Remediation Action  |
|---|-----------------|--|--|
| An attacker sends multiple SYN packets from multiple sources.   | Web server      | <ul style="list-style-type: none"> <li>Botnet</li> <li>RAT</li> <li>Logic Bomb</li> <li>Backdoor</li> <li>Virus</li> <li>Spyware</li> <li>Worm</li> <li>Adware</li> <li>Ransomware</li> <li>Keylogger</li> <li>Phishing</li> </ul> | <ul style="list-style-type: none"> <li>Enable DDoS protection</li> <li>Patch vulnerable systems</li> <li>Disable vulnerable services</li> <li>Change the default system password</li> <li>Update the cryptographic algorithms</li> <li>Change the default application password</li> <li>Implement 2FA using push notification</li> <li>Conduct a code review</li> <li>Implement application fuzzing</li> <li>Implement a host-based IPS</li> <li>Disable remote access services</li> </ul> |
| The attack establishes a connection, which allows remote commands to be executed.   | User            | <ul style="list-style-type: none"> <li>Botnet</li> <li>RAT</li> <li>Logic Bomb</li> <li>Backdoor</li> <li>Virus</li> <li>Spyware</li> <li>Worm</li> <li>Adware</li> <li>Ransomware</li> <li>Keylogger</li> <li>Phishing</li> </ul> | <ul style="list-style-type: none"> <li>Enable DDoS protection</li> <li>Patch vulnerable systems</li> <li>Disable vulnerable services</li> <li>Change the default system password</li> <li>Update the cryptographic algorithms</li> <li>Change the default application password</li> <li>Implement 2FA using push notification</li> <li>Conduct a code review</li> <li>Implement application fuzzing</li> <li>Implement a host-based IPS</li> <li>Disable remote access services</li> </ul> |
| The attack is self propagating and compromises a SQL database using well-known credentials as it moves through the network. | Database server | <ul style="list-style-type: none"> <li>Botnet</li> <li>RAT</li> <li>Logic Bomb</li> <li>Backdoor</li> <li>Virus</li> <li>Spyware</li> <li>Worm</li> <li>Adware</li> <li>Ransomware</li> <li>Keylogger</li> <li>Phishing</li> </ul> | <ul style="list-style-type: none"> <li>Enable DDoS protection</li> <li>Patch vulnerable systems</li> <li>Disable vulnerable services</li> <li>Change the default system password</li> <li>Update the cryptographic algorithms</li> <li>Change the default application password</li> <li>Implement 2FA using push notification</li> <li>Conduct a code review</li> <li>Implement application fuzzing</li> <li>Implement a host-based IPS</li> <li>Disable remote access services</li> </ul> |
| The attacker uses hardware to remotely monitor a user's input activity to harvest credentials.                              | Executive       | <ul style="list-style-type: none"> <li>Botnet</li> <li>RAT</li> <li>Logic Bomb</li> <li>Backdoor</li> <li>Virus</li> <li>Spyware</li> <li>Worm</li> <li>Adware</li> <li>Ransomware</li> <li>Keylogger</li> <li>Phishing</li> </ul> | <ul style="list-style-type: none"> <li>Enable DDoS protection</li> <li>Patch vulnerable systems</li> <li>Disable vulnerable services</li> <li>Change the default system password</li> <li>Update the cryptographic algorithms</li> <li>Change the default application password</li> <li>Implement 2FA using push notification</li> <li>Conduct a code review</li> <li>Implement application fuzzing</li> <li>Implement a host-based IPS</li> <li>Disable remote access services</li> </ul> |
| The attacker embeds hidden access in an internally developed application that bypasses account login.                       | Application     | <ul style="list-style-type: none"> <li>Botnet</li> <li>RAT</li> <li>Logic Bomb</li> <li>Backdoor</li> <li>Virus</li> <li>Spyware</li> <li>Worm</li> <li>Adware</li> <li>Ransomware</li> <li>Keylogger</li> <li>Phishing</li> </ul> | <ul style="list-style-type: none"> <li>Enable DDoS protection</li> <li>Patch vulnerable systems</li> <li>Disable vulnerable services</li> <li>Change the default system password</li> <li>Update the cryptographic algorithms</li> <li>Change the default application password</li> <li>Implement 2FA using push notification</li> <li>Conduct a code review</li> <li>Implement application fuzzing</li> <li>Implement a host-based IPS</li> <li>Disable remote access services</li> </ul> |

**Answer:**

| Attack Description  | Target          | Attack Identified | BEST Preventative or Remediation Action |
|---|-----------------|-------------------|---|
| An attacker sends multiple SYN packets from multiple sources.   | Web server      | Botnet            | Enable DDoS protection                  |
| The attack establishes a connection, which allows remote commands to be executed.   | User            | RAT               | Patch vulnerable systems                |
| The attack is self propagating and compromises a SQL database using well-known credentials as it moves through the network. | Database server | Worm              | Change the default application password |
| The attacker uses hardware to remotely monitor a user's input activity to harvest credentials.                              | Executive       | Keylogger         | Disable remote access services          |
| The attacker embeds hidden access in an internally developed application that bypasses account login.                       | Application     | Backdoor          | Conduct a code review                   |

### Question: 4

Which of the following will MOST likely adversely impact the operations of unpatched traditional programmable-logic controllers, running a back-end LAMP server and OT systems with humanmanagement interfaces that are accessible over the Internet via a web interface? (Choose two.)

- A. Cross-site scripting
- B. Data exfiltration
- C. Poor system logging
- D. Weak encryption
- E. SQL injection
- F. Server-side request forgery

**Answer: DF**

### Question: 5

A company recently transitioned to a strictly BYOD culture due to the cost of replacing lost or damaged corporate-owned mobile devices. Which of the following technologies would be BEST to balance the BYOD culture while also protecting the company's data?

- A. Containerization
- B. Geofencing
- C. Full-disk encryption
- D. Remote wipe



**Answer: A**

Explanation:

<https://www.hexnode.com/blogs/what-is-containerization-and-why-is-it-important-for-your-business/>